

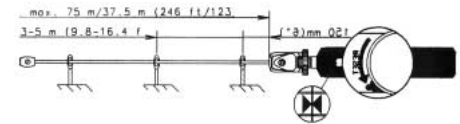



ROPE PULL SWITCH ACCESSORIES



#SRU 2ZNA QF300
 Max length 240 ft.
 Rope supports every 9' → 16' feet.

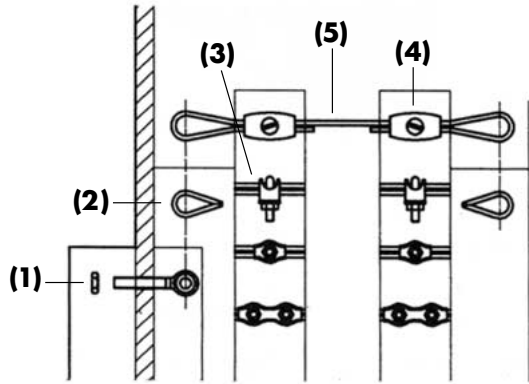

(1) Nut Eye Bolt

List

(2) Thimble

List

(3) Rope Clamp

List

(4) Screw Clamp

List

M 6 x 50 Bolt
(6mm x 50mm)

\$8

R-Thimble

\$2.50

R-Clamp

\$3

R-Clamp

\$3

M 10 x 50 Bolt
(10mm x 50mm)



(6) Spring

List

(7) Turnbuckle

List

(8) Swivel Pully Block w/clamp

List

(5) Red Cable Metal Rope

List

For use on bi-directional switches

R-Spring
(5lbs.)

\$12

R-Turnbuckle

\$15

R-Pulley

\$20

#Cable _____ ft.
 _____ enter ft.

\$0.80

For use on Sil, SiRK rope pull switches

ex: Cable 100ft.

per ft.

Contacts	Max. Rope Cable Length	Amps/Volts AC UL + CSA	Dimensions	Operations Per Minute	Pre-Tension Force	Part# NEMA 4, 12	List	Housings
 	20 ft.	10A / 300V		17	14.7 lbs.	SiEM2-UV1ZRast reset button	\$210	 Aluminum
 	32 ft.	10A / 300V		50	43 lbs.	SiD-UV1Z no reset (spring return)	\$158	 Aluminum
 	162 ft.	10A / 300V		20	56 lbs.	SiN-UV1ZPRast reset button	\$570	 Aluminum
 	325 ft.	10A / 250V IEC - NO UL CSA		10	0 lbs.	SiI1UZ/U1ZAKR-R pull ring reset	\$560	 Iron
Two Rope Springs required (one on each side) for pre-tension								
 	325 ft.	10A / 250V		30	0 lbs.	SiRK-U2ZRMLD pull lever reset contact factory	\$560	 Plastic Housing with Pilot Light
Two Rope Springs required (one on each side) for pre-tension								